


XP1840C

C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

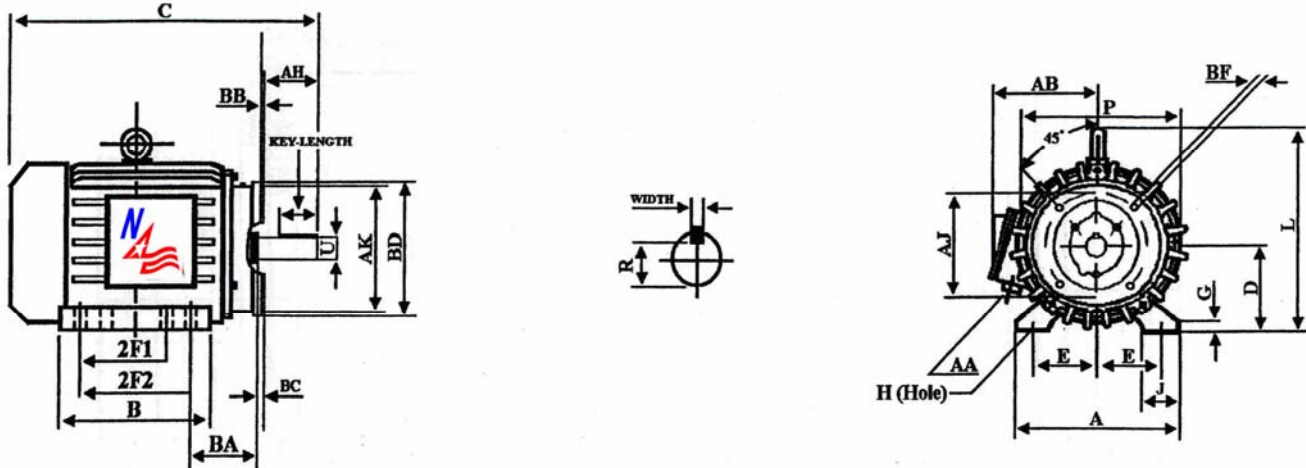

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
12.5	10.5	12	0.7	5.25	16	15.5	33.3	8	1.1	2.8	18	20	+0.25	5	15.6	2
KEY			KEYSET R	FLANGE				SHAFT EXTENSION								
WIDTH		LENGTH		AK	AJ	BF	BB	BD	N-W	U						
0.5		3.91	1.845	12.5	11	5/8-11	0.25	14	5.25	2.125						

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
40	1780	324TC	G	93.0	93.8	93.5	0.892	0.883	0.816	118.02	243	172
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
45.0	290	6312	6312	F	TEFC	1.15	734					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.northamericanelectric-inc.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP1840C

CAT. NO: XP1840C		FRAME: 324TC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6312				OPP/END BRG: 6312			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 734LBS	
USABLE ON 208V 60HZ AT: 99.5 MAX. AMPS						SER:	
DIVISION I, CASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 40 RPM: 1780			HP: 40 RPM: 1470			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 90.0/45.0			F. L. AMPS: 110.6/55.3			
	S.F. AMPS: 103.4/51.7			S.F. AMPS: 110.6/55.3			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 93.0%			NEMA NOM. EFF: 91.7%			
	NOM. P. F.: 0.892			NOM. P. F.: 0.899			
	NEMA MIN. EFF.: 91.7%			NEMA MIN. EFF.: 90.2%			
	MAX. KVAR: 10.7			MAX. KVAR: 8.33			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632
Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546
www.northamericanelectric-inc.com