


XP3625C

C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

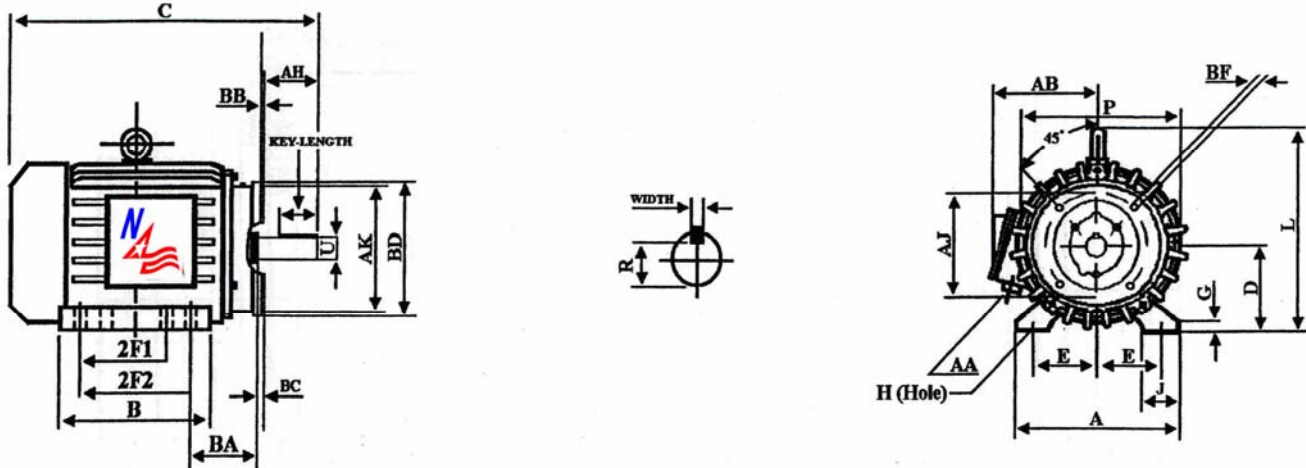

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
11	9.5	11	0.5	4.75	14	14	28.2	7	0.9	2.8	15.8	17.6	+0.25	3	14.3	1.5
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH		1.416	AK	AJ	BF	BB	BD	N-W	U					
0.375		1.91			10.5	9	1/2-13	0.25	11.25	3.25	1.625					

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
25	3545	284TSC	G	91.0	91.8	91.7	0.908	0.92	0.877	37.04	76.3	50.2
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
28.1	182	6310	6310	F	TEFC	1.15	506					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.northamericanelectric-inc.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP3625C

CAT. NO: XP3625C		FRAME: 284TSC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6310				OPP/END BRG: 6310			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 506LBS	
USABLE ON 208V 60HZ AT: 62.1 MAX. AMPS						SER:	
DIVISION I, CASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 25 RPM: 3545			HP: 25 RPM: 2930			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 56.2/28.1			F. L. AMPS: 68.2/34.1			
	S.F. AMPS: 65.0/32.5			S.F. AMPS: 68.2/34.1			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 91.0%			NEMA NOM. EFF: 89.5%			
	NOM. P. F.: 0.908			NOM. P. F.: 0.921			
	NEMA MIN. EFF.: 89.5%			NEMA MIN. EFF.: 87.5%			
	MAX. KVAR: 5.52			MAX. KVAR: 4.34			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632
Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546
www.northamericanelectric-inc.com