


NA254TC-15-2

C-Face General Purpose Hostile Duty Motor

Energy Efficient – Three Phase – TEFC - AC Motor - Inverter Rated (10:1 VT; 5:1 CT)

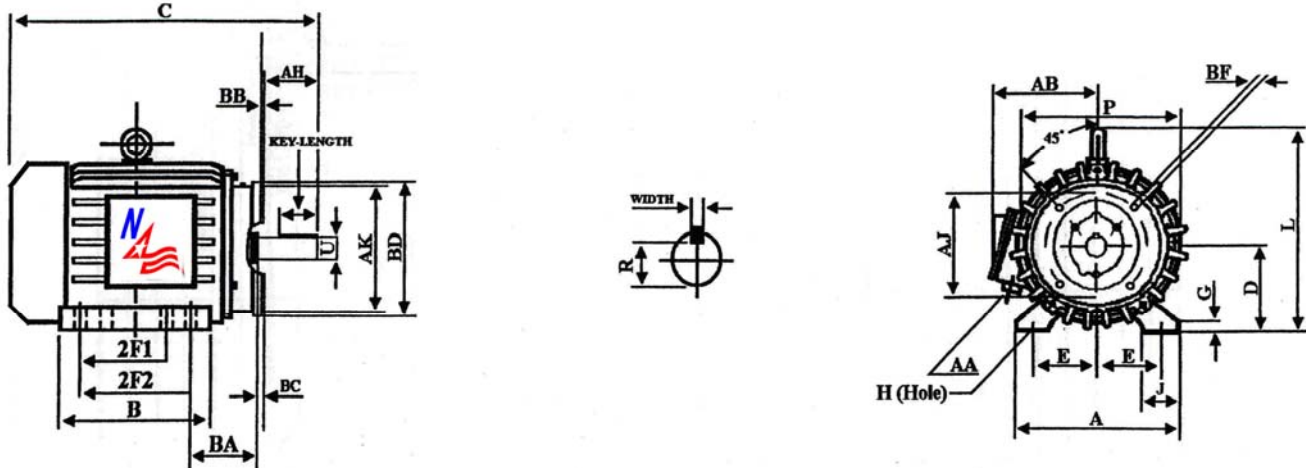

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA		
E	2F1	2F2	H	BA														
5.0	8.25	NA	0.53	4.75	13.0	10.4	23.2	6.25	0.8	2.87	12.4	15.2	+0.25	3.75	10.1	1.25		
KEY			KEYSET R		FLANGE					SHAFT EXTENSION								
WIDTH		LENGTH		AK		AJ		BF		BB		BD		N-W		U		
0.375		2.91		1.416		8.5		7.25		1/2-13		0.25		10		4		1.625

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
15	3515	254TC	G	90.2	89.5	88.8	90.0	89.0	83.5	22.4	270	180
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
17.5	116.0	6309	6309	F	TEFC	1.15	272					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com