


## PE444TSC-125-2

### C-FACE PREMIUM EFFICIENT / INVERTER DUTY MOTOR

Minimum Guaranteed Full Load Efficiency =94.1% - Inverter Duty (20:1 Variable Torque; 10:1 Constant Torque)

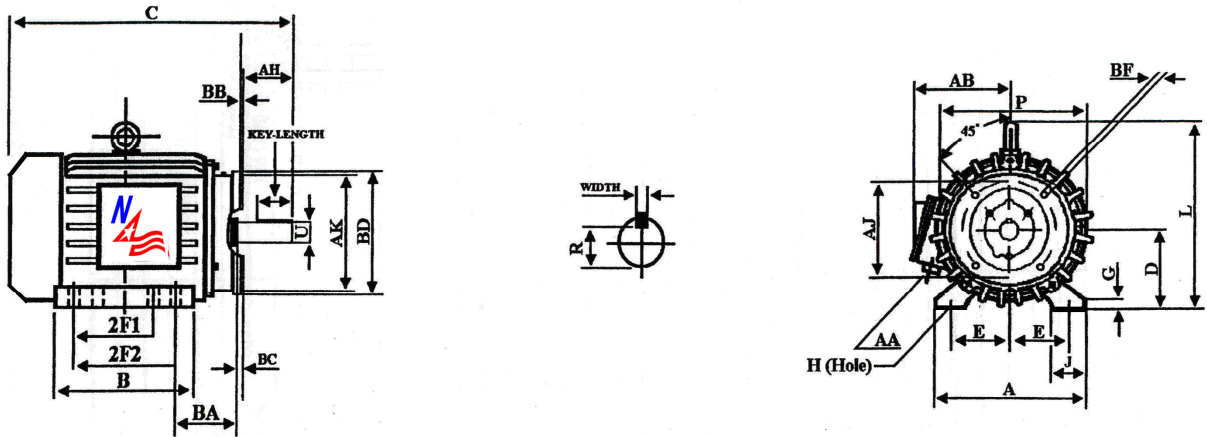

### DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
9.0	14.5	NA	0.81	7.5	21.7	22.9	40.6	11.0	1.3	3.15	21.6	25.1	+0.25	4.5	16.6	3
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH		R	AK	AJ	BF	BB	BD	N-W	U					
0.625		3.03			2.021	16	14	5/8-11	0.25	18.0	4.75	2.375				

### PERFORMANCE DATA

Three Phase – TEFC – AC Motor – 60Hz - 460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
125	3565	444TSC	G	95.0	94.4	93.8	92.0	92.5	90.5	184	250	190
Amps ( 460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
135	907	6314	6314	F	TEFC	1.15	1247					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)