


XP12100

General Purpose Explosion Proof Motor

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

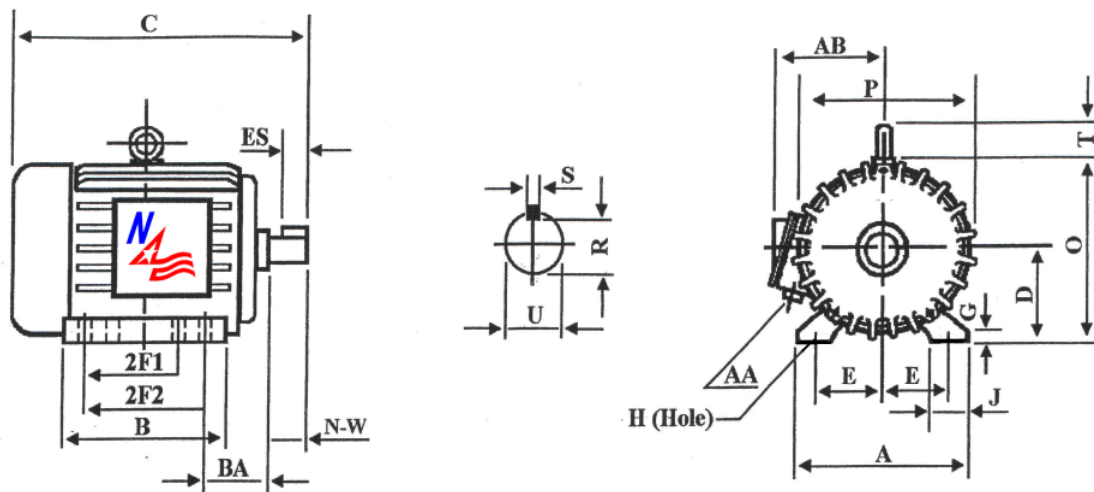

DIMENSIONS – INCHES

A	B	C	D	E	2F1	2F2	G	H	J	O
22	20.5	45.5	11	9.0	14.5	16.5	1.4	0.8	3.4	23.5
P	R	S	T	U	ES	AA	AB	BA	N-W	Mount
24	2.88	0.875	3.5	3.375	6.91	3	19.7	7.5	8.5	F1

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B – Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
100	1185	444T	G	94.1	95.0	94.7	0.896	0.873	0.819	443.21	908	576
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
111.7	725	6318	6314	F	TEFC	1.15	1745					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP12100

CAT. NO: XP12100		FRAME: 444T		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6318				OPP/END BRG: 6314			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 1745LBS	
USABLE ON 208V 60HZ AT: 247.0 MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 100 RPM: 1185			HP: 100 RPM: 985			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 223.4/111.7			F. L. AMPS: 276.8/138.4			
	S.F. AMPS: 259.2/129.6			S.F. AMPS: 276.8/138.4			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 94.1%			NEMA NOM. EFF: 93.0%			
	NOM. P. F.: 0.896			NOM. P. F.: 0.885			
	NEMA MIN. EFF.: 93.0%			NEMA MIN. EFF.: 91.7%			
	MAX. KVAR: 22.0			MAX. KVAR: 20.1			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com