


# XP1215C

## C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

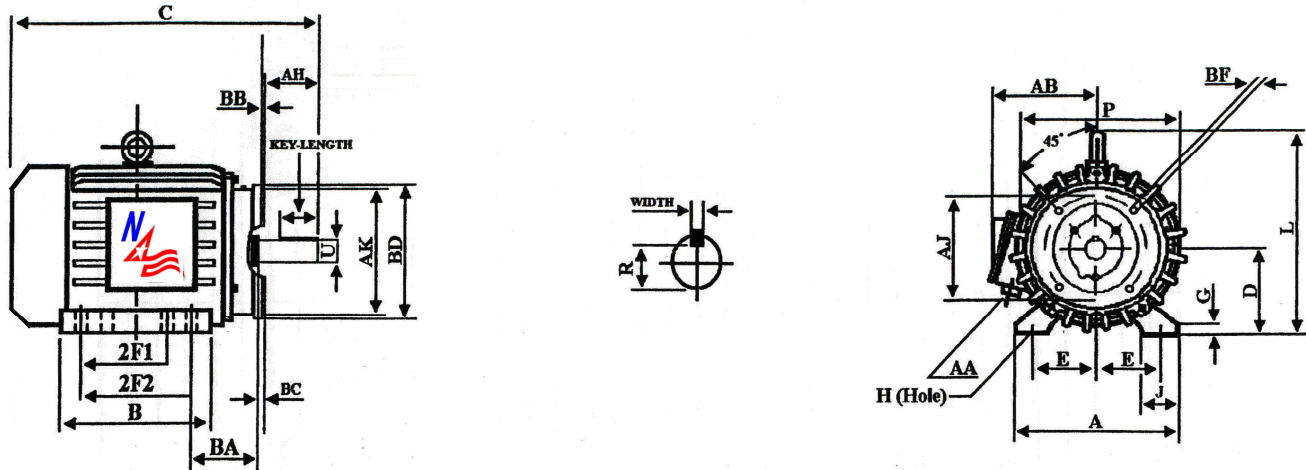

### DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
5.5	9.5	11	0.5	4.75	14	14	29.6	7	0.9	2.8	15.8	17.6	+0.25	4.38	14.3	1.5
KEY			KEYSET R	FLANGE				SHAFT EXTENSION								
WIDTH	LENGTH			AK	AJ	BF	BB	BD	N-W	U						
0.5	3.28		1.591	10.5	9	1/2-13	0.25	11.25	4.62	1.875						

### PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
15	1175	284TC	G	90.2	92.2	92.0	0.841	0.819	0.728	67.05	138	97.6
Amps ( 460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
18.2	116	6310	6310	F	TEFC	1.15	495					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)



**50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.**

## **XP1215C**

<b>CAT. NO: XP1215C</b>		<b>FRAME: 284TC</b>		<b>ENCL: TEFC</b>		<b>PHASE: 3</b>	
<b>SHAFT END BRG: 6310</b>				<b>OPP/END BRG: 6310</b>			
<b>MAX. AMB: 40° C</b>		<b>INS CLASS: F</b>		<b>RATING: CONT.</b>		<b>MOTOR WEIGHT: 495LBS</b>	
<b>USABLE ON 208V 60HZ AT:   MAX. AMPS</b>						<b>SER:</b>	
<b>DIVISION I, CASS I, GROUPS C &amp; D CLASS II, GROUPS E, F &amp; G</b>						<b>OP TEMP CODE: T3C</b>	
<b>60 HERTZ DATA</b>	<b>HP: 15   RPM: 1175</b>			<b>HP: 15   RPM: 970</b>			<b>50 HERTZ DATA</b>
	<b>VOLTAGE: 230/460V</b>			<b>VOLTAGE: 190/380V</b>			
	<b>F. L. AMPS: 36.4/18.2</b>			<b>F. L. AMPS: 43.8/21.9</b>			
	<b>S.F. AMPS: 41.6/20.8</b>			<b>S.F. AMPS: 43.8/21.9</b>			
	<b>S.F. 1.15</b>	<b>DESIGN: B</b>	<b>CODE: G</b>	<b>S.F. 1.0</b>	<b>DESIGN:</b>	<b>CODE: H</b>	
	<b>NEMA NOM. EFF: 90.2%</b>			<b>NEMA NOM. EFF: 88.5%</b>			
	<b>NOM. P. F.: 0.841</b>			<b>NOM. P. F.: 0.862</b>			
	<b>NEMA MIN. EFF.: 88.5%</b>			<b>NEMA MIN. EFF.: 86.5%</b>			
	<b>MAX. KVAR: 5.73</b>			<b>MAX. KVAR: 4.16</b>			

**Note: F.L. = Full Load   P.F. = Power Factor   S.F. = Service Factor**



**North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632**

**Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546**

[www.naemotors.com](http://www.naemotors.com)