


XP12250C

General Purpose Explosion Proof Motor

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

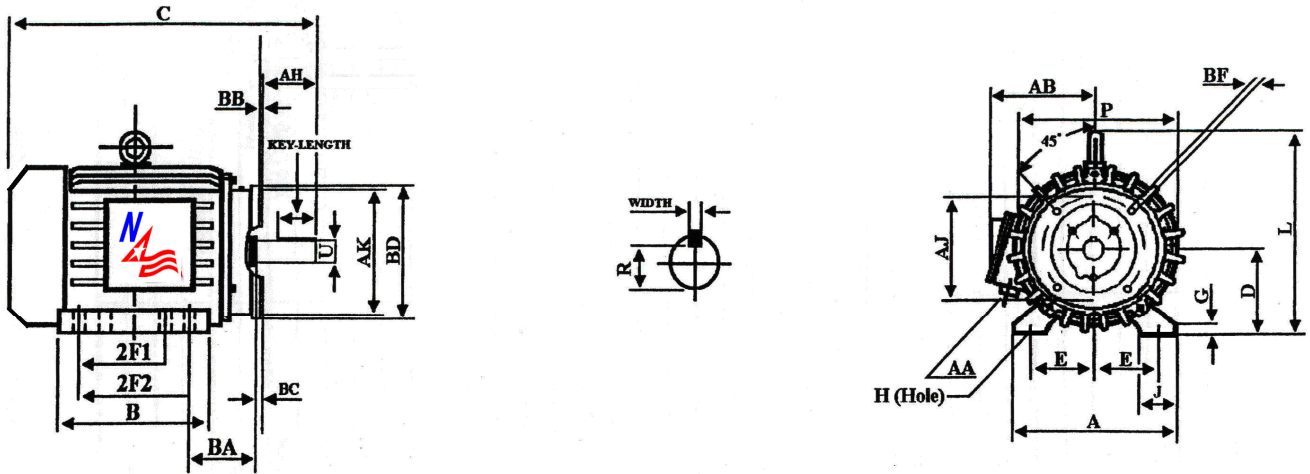

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
9	20.0	25.0	0.8	7.5	22	31.0	55.5	11	1.38	3.7	24	27.75	+0.25	8.25	21.3	3
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH	LENGTH		R		AK	AJ	BF	BB	BD	N-W	U					
0.875	6.93		2.88		16	14	5/8-11	0.25	18	8.5	3.375					

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B – Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
250	1190	449TC	G	95.0	95.6	95.5	84.6	84.2	79.7	1097	2194	1426
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
288.8	1446.9	6318	6318	F	TEFC	1.15	2352					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP12250C

CAT. NO: XP12250C		FRAME: 449TC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6318				OPP/END BRG: 6318			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 2352 LBS	
USABLE ON 208V 60HZ AT: MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 250 RPM: 1190			HP: 250 RPM: 985			50 HERTZ DATA
	VOLTAGE: 460V			VOLTAGE: 380V			
	F. L. AMPS: 288.8			F. L. AMPS: 348.1			
	S.F. AMPS: 332.1			S.F. AMPS: 348.1			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 95.0%			NEMA NOM. EFF: 94.1%			
	NOM. P. F.: 0.846			NOM. P. F.: 0.858			
	NEMA MIN. EFF.: 94.1%			NEMA MIN. EFF.: 93.0%			
	MAX. KVAR: 70.5			MAX. KVAR: 54.8			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com