


# XP1275C

## C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

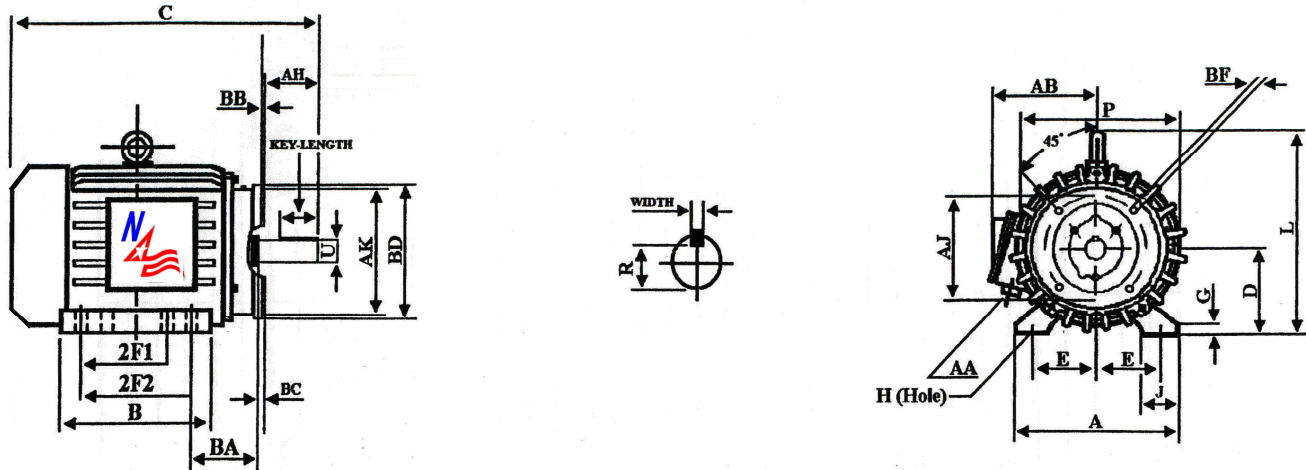

### DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA	20	17.8	38.6	10	1.2	3.2	21.6	24.2	+0.25	7	18.7	3
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH		AK	AJ	BF	BB	BD	N-W	U						
0.75		5.65		2.45	12.5	11	5/8-11	0.25	15.5	7.25	2.875					

### PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
75	1185	405TC	G	93.6	94.6	94.4	0.878	0.871	0.813	332.41	681	465
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
84.0	542	6316	6316	F	TEFC	1.15	1347					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)



**50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.**

## **XP1275C**

CAT. NO: XP1275C		FRAME: 405TC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6316				OPP/END BRG: 6316			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 1347LBS	
USABLE ON 208V 60HZ AT:      MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 75    RPM: 1185			HP: 75    RPM: 980			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 168.0/84.0			F. L. AMPS: 202.4/101.2			
	S.F. AMPS: 193.8/96.9			S.F. AMPS: 202.4/101.2			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 93.6%			NEMA NOM. EFF: 92.4%			
	NOM. P. F.: 0.878			NOM. P. F.: 0.894			
	NEMA MIN. EFF.: 92.4%			NEMA MIN. EFF.: 91.0%			
	MAX. KVAR: 17.1			MAX. KVAR: 12.3			

Note: F.L. = Full Load      P.F. = Power Factor    S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)