


XP18200C

C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

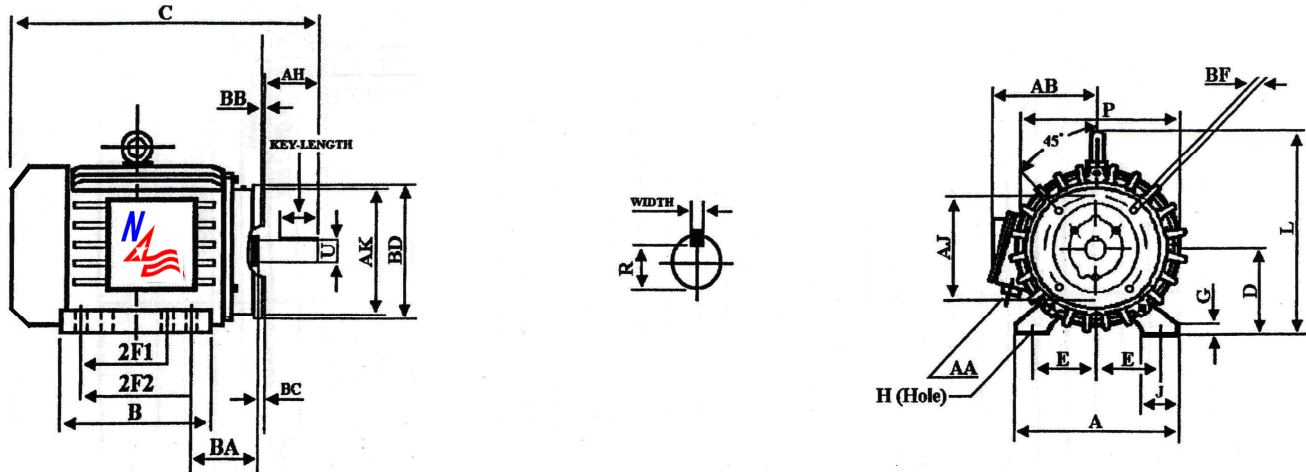

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
9	20	25	0.81	7.5	22	31	55.5	11	1.4	3.7	24	28	+0.25	8.25	19.7	3
KEY				KEYSET R	FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH			AK	AJ	BF	BB	BD	N-W		U				
0.875		6.91		2.88	16	14	5/8-11	0.25	18	8.5		3.375				

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
200	1780	447TC	G	95.0	95.2	95.0	89.8	90.9	88.2	588.46	1206	618
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
222.7	1450	6318	6318	F	TEFC	1.15	2300					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP18200C

CAT. NO: XP18200C		FRAME: 447TC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6318				OPP/END BRG: 6318			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 2300LBS	
USABLE ON 208V 60HZ AT: MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 200 RPM: 1780			HP: 200 RPM: 1475			50 HERTZ DATA
	VOLTAGE: 460V			VOLTAGE: 380V			
	F. L. AMPS: 222.7			F. L. AMPS: 269.4			
	S.F. AMPS: 256.1			S.F. AMPS: 269.4			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 95.0%			NEMA NOM. EFF: 94.1%			
	NOM. P. F.: 0.898			NOM. P. F.: 0.899			
	NEMA MIN. EFF.: 94.1%			NEMA MIN. EFF.: 93.0%			
	MAX. KVAR: 33.7			MAX. KVAR: 27.6			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com