


# XP1820C

## C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

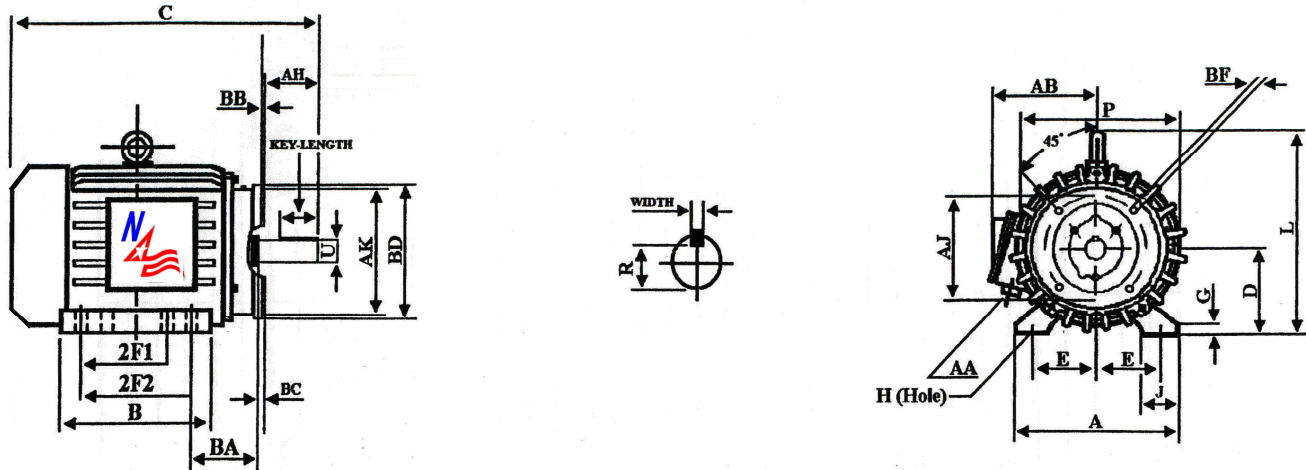

### DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
5	8.25	10	0.5	4.75	12.5	12.5	26.2	6.25	0.9	2.8	14.1	15.8	+0.25	3.75	13.6	1.25
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH			AK	AJ	BF		BB	BD	N-W	U				
0.375		2.91			1.416	8.5	7.3	1/2-13		0.25	10	4	1.625			

### PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
20	1760	256TC	G	91.0	92.7	92.8	0.90	0.888	0.821	59.68	123	92.7
Amps ( 460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
23.0	145	6309	6309	F	TEFC	1.15	425					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)



**50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.**

## **XP1820C**

CAT. NO: XP1820C		FRAME: 256TC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6309				OPP/END BRG: 6309			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 425LBS	
USABLE ON 208V 60HZ AT: 50.9 MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 20 RPM: 1760			HP: 20 RPM: 1455			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 46.0/23.0			F. L. AMPS: 56.0/28.0			
	S.F. AMPS: 53.0/26.5			S.F. AMPS: 56.0/28.0			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 91.0%			NEMA NOM. EFF: 89.5%			
	NOM. P. F.: 0.90			NOM. P. F.: 0.909			
	NEMA MIN. EFF.: 89.5%			NEMA MIN. EFF.: 87.5%			
	MAX. KVAR: 5.55			MAX. KVAR: 4.16			

Note: F.L. = Full Load      P.F. = Power Factor      S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)