


XP3660C

C-Face General Purpose Explosion Proof Motors

Class I, Division I, Groups C & D and Class II, Division I, Groups E, F and G - Operating Temperature Code: T3C

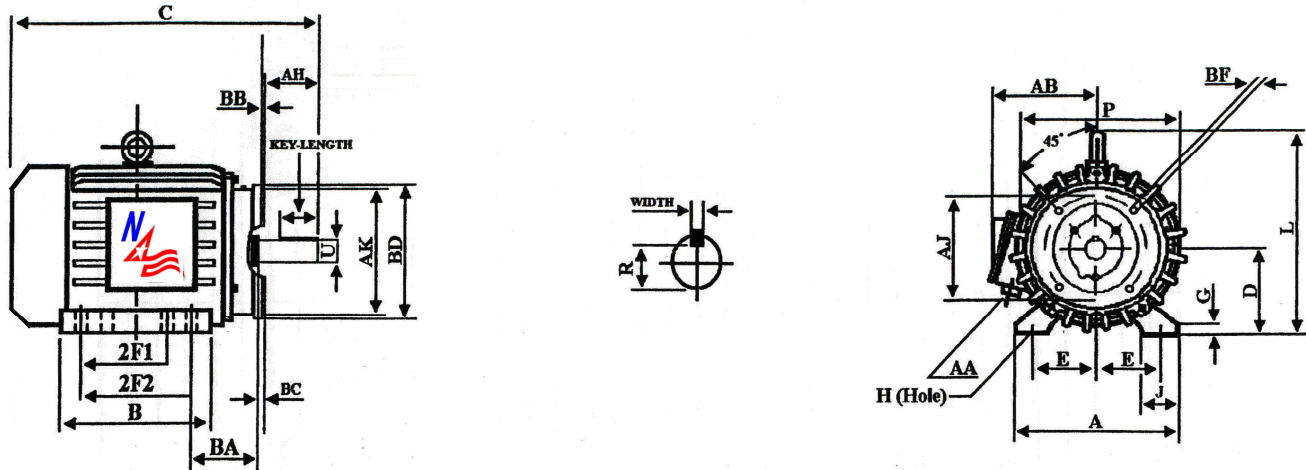

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA	18	16.2	33.3	9	1.1	3	19.5	21.5	+0.25	3.5	16.5	3
KEY			KEYSET R		FLANGE					SHAFT EXTENSION						
WIDTH		LENGTH		AK	AJ	BF	BB	BD	N-W	U						
0.5		2.03		1.591	12.5	11	5/8-11	0.25	14	3.75	1.875					

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
60	3555	364TSC	G	93.0	93.3	92.9	0.910	0.909	0.861	88.64	181.0	111.0
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
66.5	435	6313	6313	F	TEFC	1.15	874					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com



50Hz AND 60Hz DATA FOR 3 PHASE AC INDUCTION MOTOR AS IT APPEARS ON THE NAMEPLATE.

XP3660C

CAT. NO: XP3660C		FRAME: 364TSC		ENCL: TEFC		PHASE: 3	
SHAFT END BRG: 6313				OPP/END BRG: 6313			
MAX. AMB: 40° C		INS CLASS: F		RATING: CONT.		MOTOR WEIGHT: 874LBS	
USABLE ON 208V 60HZ AT: 147.1 MAX. AMPS						SER:	
DIVISION I, CLASS I, GROUPS C & D CLASS II, GROUPS E, F & G						OP TEMP CODE: T3C	
60 HERTZ DATA	HP: 60 RPM: 3555			HP: 60 RPM: 2955			50 HERTZ DATA
	VOLTAGE: 230/460V			VOLTAGE: 190/380V			
	F. L. AMPS: 133.0/66.5			F. L. AMPS: 163.6/81.8			
	S.F. AMPS: 153.0/76.5			S.F. AMPS: 163.6/81.8			
	S.F. 1.15	DESIGN: B	CODE: G	S.F. 1.0	DESIGN:	CODE: H	
	NEMA NOM. EFF: 93.0%			NEMA NOM. EFF: 91.7%			
	NOM. P. F.: 0.91			NOM. P. F.: 0.911			
	NEMA MIN. EFF.: 91.7%			NEMA MIN. EFF.: 90.2%			
	MAX. KVAR: 13.5			MAX. KVAR: 10.5			

Note: F.L. = Full Load P.F. = Power Factor S.F. = Service Factor



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com