


NA145JP-1.5-4

Special Purpose JP Frame Close-Coupled Pump Motor

Energy Efficient – Three Phase – TEFC - AC Motor - Inverter Rated (10:1 VT; 5:1 CT)

DIMENSIONS – INCHES

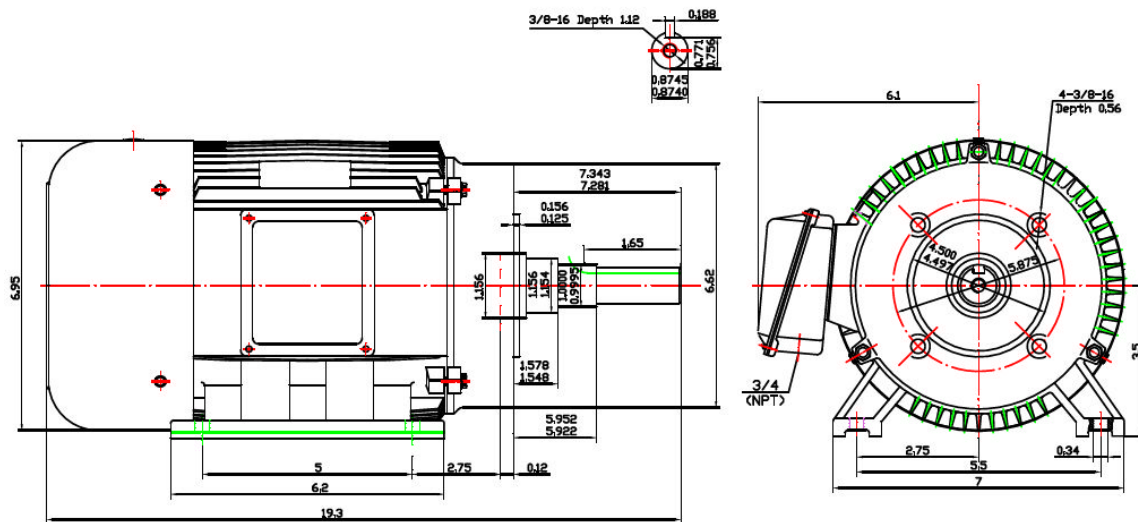

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

| HP | Speed | Frame | NEMA Code | Efficiency (%) | | | Power Factor (%) | | | Torque (ft-lb) | | |
|--------------|-------|------------|-------------|------------------|----------------|----------------|------------------|------|------|----------------|------|------|
| | | | | 100% | 75% | 50% | 100% | 75% | 50% | FLT | BDT% | LRT% |
| 1.5 | 1740 | 145JP | M | 84.0 | 83.6 | 82.4 | 76.0 | 70.0 | 57.0 | 4.50 | 310 | 300 |
| Amps (460V) | | DE Bearing | ODE Bearing | Insulation Class | Enclosure Type | Service Factor | Weight (lbs) | | | | | |
| FLA | LRA | | | | | | | | | | | |
| 2.2 | 20.0 | 6205ZZ | 6205ZZ | F | TEFC | 1.15 | 51 | | | | | |



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632
Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com