


## PE326T-30-6C

### PREMIUM CRUSHER DESIGN MOTOR

Inverter Rated (10:1 Variable Torque; 5:1 Constant Torque)

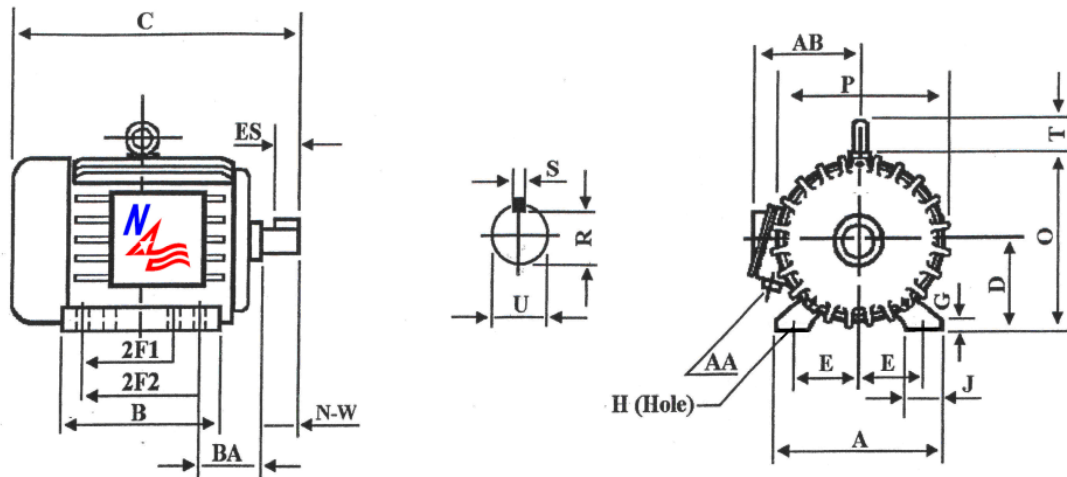

#### DIMENSIONS – INCHES

A	B	C	D	E	2F1	2F2	G	H	J	O
15.5	14.7	31.3	8.0	6.25	10.5	12	1.0	.66	2.76	15.9
P	R	S	T	U	ES	AA	AB	BA	N-W	Mount
15.7	1.845	.50	2.6	2.125	3.91	2.0	12.3	5.25	5.25	F1

#### PERFORMANCE DATA

Three Phase – TEFC – AC Motor – 60Hz - 208-230/460V – NEMA Design C - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
30	1180	326T	G	91.7	91.8	91.4	85.0	79.0	71.0	134	240	210
Amps ( 460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
36.5	217	6312	6312	F	TEFC	1.15	537					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)