


## PE145TC-2-4

### PREMIUM EFFICIENT / INVERTER DUTY MOTOR

Minimum Guaranteed Full Load Efficiency =84.0% - Inverter Duty (20:1 Variable Torque; 10:1 Constant Torque)

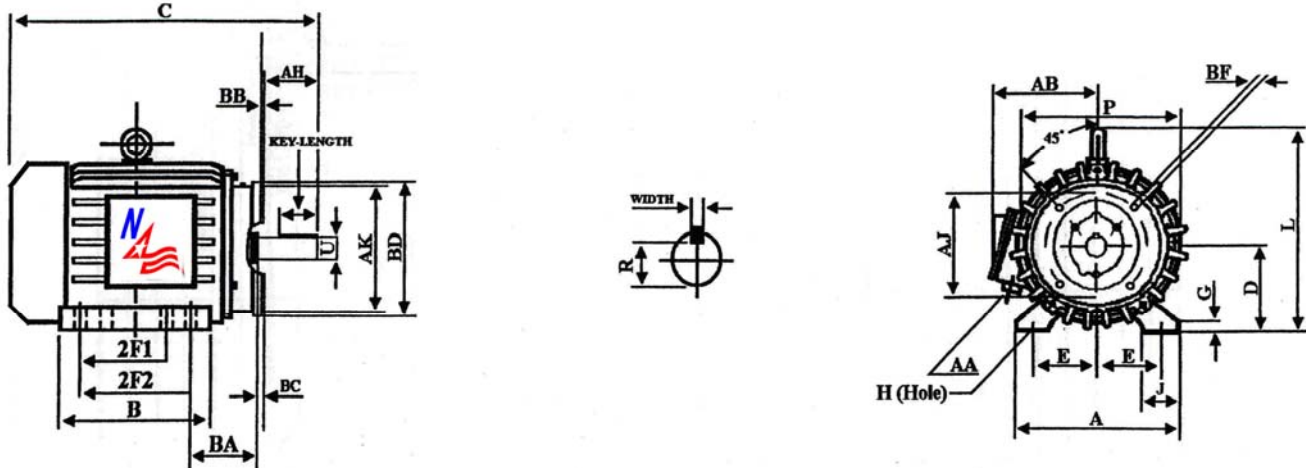

#### DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	J	P	L	BC	AH	AB	AA
E	2F1	2F2	H	BA												
2.75	4	5	0.34	2.75	7	6.2	13.6	3.5	0.4	1.45	6.95	7.1	+0.12	2.12	6.1	0.75
KEY				KEYSET R	FLANGE				SHAFT EXTENSION							
WIDTH	LENGTH				AK	AJ	BF	BB	BD	N-W	U					
0.188	1.41			0.771	4.5	5.875	3/8-16	0.16	6.5	2.25	0.875					

#### PERFORMANCE DATA

Three Phase – TEFC – AC Motor – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
2	1740	145TC	L	86.5	86.7	86.4	80.0	75.0	63.0	6.05	330	320
Amps ( 460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
2.8	25.0	6205ZZ	6205ZZ	F	TEFC	1.15	56					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

[www.naemotors.com](http://www.naemotors.com)